

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification 6 :</b> <b>C25B 9/00, C25D 5/10, C23C 26/00, 28/02</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 98/40537</b> <b>(43) International Publication Date:</b> 17 September 1998 (17.09.98)
<b>(21) International Application Number:</b> PCT/US98/04629 <b>(22) International Filing Date:</b> 10 March 1998 (10.03.98)  <b>(30) Priority Data:</b> 08/814,140 10 March 1997 (10.03.97) US  <b>(71) Applicant:</b> UNITED TECHNOLOGIES CORPORATION [US/US]; Hamilton Standard Division, One Hamilton Road, Windsor Locks, CT 06096-1010 (US).  <b>(72) Inventors:</b> ROY, Robert, J.; 87 Christopher Street, West Springfield, MA 01089 (US). LEONIDA, Andrei; 2 Lincoln Avenue, West Hartford, CT 06117 (US). GAROSSHEN, Thomas, J.; 185 Tamarac Drive, Glastonbury, CT 06033 (US). MOLTER, Trent, M.; 41 Kimberly Drive, Enfield, CT 06082 (US).  <b>(74) Agent:</b> KELLY, Robert, H.; Intellectual Property Counsel, Hamilton Standard, One Hamilton Road, Windsor Locks, CT 06096-1010 (US).		<b>(81) Designated States:</b> IL, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> GRADED METAL HARDWARE COMPONENT FOR AN ELECTROCHEMICAL CELL		
<b>(57) Abstract</b>  A graded metal hardware component for an electrochemical cell is shown for mechanically supporting electrochemical cell structures and defining fluid cavities and fluid passages in a cell employing a solid polymer electrolyte membrane. The graded metal hardware component includes a substrate such as stainless steel, a surface layer made of a precious metal such as gold, and a graded boundary layer adjacent to and between the substrate and surface layer, wherein the graded boundary layer is an interdiffusion of the substrate and surface layer so that the graded boundary layer is between 0.5 wt.-%-5.0 wt.-% of the material making up the substrate, and between 99.5 wt.-%-95.0 wt.-% of the material making up the surface layer, and the graded boundary layer has a thickness of between 10 %-90 % of a shortest distance between the substrate and an exterior surface of the surface layer. In a preferred embodiment a shortest distance between the substrate and an exterior surface of the surface layer is between 50 to 120 microinches, and the exterior surface of the surface layer has a hardness of between 150 to 200 on the Knopp scale. A preferred method of manufacturing the graded metal hardware component includes the steps of first applying a coating of acid gold to the substrate, then applying a hard gold coating to the once coated substrate to form the surface layer, and finally heat treating the twice coated substrate to between 200 degrees Celsius ("°C") to 500 °C for between 1 to 24 hours to form the graded boundary layer.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

- 1 -

**GRADED METAL HARDWARE COMPONENT FOR AN ELECTROCHEMICAL CELL****Technical Field**

The present invention relates to electrochemical cell stacks for electrolyzing substances, and especially relates to high pressure electrochemical cell stacks for producing oxygen and hydrogen gases from water for use in air and space craft.

**Background of the Invention**

Electrochemical cells are commonly used for producing product gases from a supply fluid such as water, and may also be used in "fuel cell" configurations to produce electrical energy from supply fuels. Well known applications of the product gases include air and space craft oxygen storage, gas storage for energy conversion and space craft propulsion. A plurality of planar electrochemical cells are typically arranged in a vertical stack to satisfy specific application requirements. In such a stack the cells include common components that integrate the stack as a functional system. For example, each cell includes hardware components that define fluid cavities and fluid passages for fluid entry, processing and fluid exit from the stack; that conduct electricity; and that provide mechanical support for cell structures such as an electrolyte, seals, etc.

Electrochemical cell stacks utilized for production of oxygen and hydrogen gas from water face a variety of specific and challenging requirements. First, operational efficiencies of such electrochemical cell stacks and storage efficiencies of gases generated by the stacks increase with increased internal operating pressures. Consequently internal operating pressures often increase to levels as high as approximately 6,000 pounds per square inch (hereafter "p.s.i."). Therefore, the hardware

- 2 -

components of individual electrochemical cells must sustain substantial pressure differentials without failure.

Second, modern electrochemical cells often use solid polymer electrolyte membranes that have highly acidic functional groups. When such a membrane is used in a cell that electrolyzes water as a supply fluid into oxygen and hydrogen gas, the aqueous solution in contact with the membrane surface becomes highly acidic. Consequently, surfaces of the cell's hardware components must be chemically stable when exposed to such an acidic aqueous solution. Third, during operation of an electrochemical cell, the electrically conductive hardware components of the cell that participate in conducting electricity are exposed to anodic and cathodic polarization. Fourth, electrolysis of water produces high pressure hydrogen gas, which deteriorates many metals by a process well-known as "hydrogen embrittlement". Accordingly, materials used to make the hardware components must exhibit a satisfactory degree of mechanical strength and chemical stability when exposed to the aforesaid pressure differential, low pH, anodic or cathodic polarization, and hydrogen embrittlement problems. For example, while most stainless steels exhibit satisfactory mechanical strength properties, unfortunately under anodic polarization and exposure to an acidic solution stainless steels dissolve at an unacceptable rate, and therefore are not satisfactory materials to make hardware components of electrochemical cells.

An additional fifth requirement of hardware components of such cells is that they have sufficiently hard surfaces to withstand fabrication and operational stresses in assembly of an individual cell; assembly of the cells into an electrochemical cell stack; and, operation of the stack. Typically, the hardware components define fluid passages passing between components and must therefore have smooth sealing surfaces to restrict improper fluid movement out of

- 3 -

the passages at extremely high operating pressures. If a surface of a hardware component sustains a scratch or fracture during assembly, safe operation of the entire stack may be jeopardized. Assembly of such an electrochemical stack typically involves use of a plurality of nuts, bolts, washers, etc. surrounding the cells and passing between end plates to adequately pre-load seals, etc., while a variety of ducts, piping, control valves, and measuring instruments must likewise be secured to and within the stack.

Maintenance of integrity of such seals within the stack is accomplished through well-known compression components that cooperate to oppose internal operating pressures. The same compression components insure even, uninterrupted flow of electrical current through the cells and through specific hardware components of each cell. Electrical continuity and uniform current distribution through hardware components of such cell stacks is achieved through metal-to-metal contact of adjacent hardware components. The compression components maintain a compressive load over the entire area of the cell assembly of a magnitude greater than, and opposing internal operating pressures that may be up to 6,000 p.s.i., thus insuring mechanical cell integrity and proper flow of electrical current. Because of the aforesaid five specific operational and assembly requirements, most hardware components are made of specialty metals such as niobium, zirconium, titanium or alloys thereof that are chemically stable, mechanically strong, and have hard surfaces. Where electrochemical cell stacks have been employed to service limited production applications such as submarines or space craft, such specialty metal material requirements have not posed significant cost problems.

However, a recent demand for use of electrochemical cell stacks has arisen in producing oxygen gas onboard

- 4 -

modern, commercial aircraft. For example, in the event of an emergency, such as an unexpected de-pressurization at a high altitude, oxygen masks automatically deploy to provide passengers with oxygen. The oxygen is typically stored  
5 onboard the air craft in metal bottles, and the bottles are routinely topped off while the aircraft is being serviced. An electrochemical cell stack onboard the aircraft can be used to top off the bottles thereby saving the time and cost expense of servicing on the ground, and such a cell  
10 stack can provide oxygen for other, diverse circumstances. Known electrochemical cell stacks, however, utilize hardware components made of the aforesaid specialty metals which restrict their availability to satisfy the commercial aircraft onboard oxygen generation demand primarily because  
15 of the prohibitive cost of the specialty metals.

Known bi-metals having a first metal substrate with a plated or coated second metal surface layer have surfaces too soft for application as hardware components. That is because such bi-metals have the surface layer selected and  
20 applied to resolve chemical stability, electrical conductivity, or appearance problems. A common bi-metal usage is to extend the longevity of an electrode in a cell by coating a substrate such as titanium with a surface layer such as a metal from the platinum group, thereby  
25 enhancing chemical stability of the electrode against dissolution by an electrolyte. Such bi-metals are not susceptible of practical usage as hardware components of the aforesaid high pressure electrochemical cells because of the rigorous demands of those cells for mechanical  
30 strength, chemical stability, and a hard surface. For example, a common problem with bi-metals is durability of a boundary between the surface layer and substrate. Under ordinary mechanical stress of electrochemical cell stacks necessary for adequate sealing, etc., and especially where  
35 electrical continuity and uniform current distribution

- 5 -

depends upon uninterrupted flow through metal-to-metal contact of adjacent hardware components, interruption of the boundary between the substrate and surface layer would result in inefficient cell operation, or even cell failure due primarily to chemical instability of the substrate in such a working environment. Because known bi-metals are not designed for the rigorous requirements of hardware components of electrochemical cell stacks, they are incapable of transferring the stack's enormous compressive load from the surface layer to the substrate without unacceptable interruption of the boundary between the surface layer and substrate.

Accordingly, it is the general object of the present invention to provide a graded metal hardware component for an electrochemical cell that overcomes cost, mechanical strength and durability deficiencies of the prior art.

It is a more specific object to provide a graded metal hardware component for an electrochemical cell that is chemically stable in operating conditions of the cell.

It is another specific object to provide a graded metal hardware component for an electrochemical cell having adequate mechanical strength for support of cell structures exposed to high pressure operating conditions.

It is yet another object to provide a graded metal hardware component for an electrochemical cell that has a surface hardness adequate to resist damage during assembly of the cell and of assembly of the cell in an electrochemical cell stack and during operation of the stack.

It is a further object to provide a graded metal hardware component for an electrochemical cell that transfers an ordinary compressive load of the cell from a surface layer to a substrate without interruption of a boundary between the surface layer and substrate.

These and other advantages of this invention will



- 6 -

become more readily apparent when the following description is read in conjunction with the accompanying drawings.

#### Summary of the Invention

A graded metal hardware component for an electrochemical cell is disclosed for mechanically supporting electrochemical cell structures and defining fluid cavities and passages for fluid entry, electrolytic processing and fluid exit in a high pressure electrochemical cell employing a solid polymer electrolyte membrane. In a particular embodiment, the graded metal hardware component comprises a substrate such as stainless steel, a surface layer made of a precious metal such as gold, and a graded boundary layer adjacent to and between the substrate and surface layer, the graded boundary layer comprising an interdiffusion of the substrate and surface layer wherein the graded boundary layer is between 0.5 weight per cent ("wt.%") - 5.0wt.% of the material making up the substrate, and between 99.5wt.% - 95.0wt.% of the material making up the surface layer, and wherein the graded boundary layer has a thickness of between 10% - 90% of a shortest distance between the substrate and an exterior surface of the surface layer. In a preferred embodiment a shortest distance between the substrate and an exterior surface of the surface layer is between 50 to 120 microinches, and the exterior surface of the surface layer has a hardness of between 150 to 200 on the Knoop scale.

A preferred method of manufacturing the graded metal hardware component includes the steps of first applying a coating of acid gold to the substrate, then applying a hard gold coating to the once coated substrate, and finally heat treating the twice coated substrate at between 200 degrees Celsius (hereafter "°C") to 500°C for between 1 to 24 hours. A preferred method for application of the coatings or deposits of the acid and hard gold is electroplating.

- 7 -

By first coating the substrate with the acid gold, an enhanced adhesion takes place between the substrate and the gold. By next coating the acid gold with the hard gold and then heat treating the coated substrate, the resulting surface layer demonstrates hardness appropriate for requirements of hardware components of high pressure electrochemical cells while the surface and graded boundary layers combine to shield the substrate from deleterious effects of anodic polarization of the substrate as it is exposed to an aqueous acidic solution. The hardness of the surface layer minimizes any possibility of defects in the surface layer resulting from assembly stresses such as scratches, cracks, etc., and the graded boundary layer formed through interdiffusion of acid and hard gold with the substrate substantially enhances adhesion of the surface and graded boundary layer to the substrate. The graded metal hardware component of the present invention allows utilization of a relatively inexpensive substrate such as stainless steel that offers low cost and necessary mechanical strength, while the surface and graded boundary layers combine to provide necessary chemical stability and a hard surface required of hardware components of a high pressure electrochemical cell utilizing a solid polymer electrolyte membrane.

## 25 Brief Description of the Drawings

Figure 1 is an exploded schematic view of an electrochemical cell employing graded metal hardware components constructed in accordance with the present invention.

30 Figure 2 is a flat plan view of a graded metal hardware component of the Figure 1 electrochemical cell.

Figure 3 is a cross-sectional, expanded, fragmentary view of a portion of the Figure 2 graded metal hardware component taken along view lines 3 - 3 of Figure 2.

- 8 -

Figure 4 is a graph showing polarization behavior of a graded metal hardware component constructed in accordance with the present invention compared to a reference hardware component.

#### 5 Detailed Description of the Preferred Embodiment

Referring to the drawings in detail, a graded metal hardware component of the present invention is best shown in FIGS. 2 and 3 is generally designated by the reference numeral 10. As best seen in FIG. 1, an appropriate working  
10 environment for the graded metal hardware component is an electrochemical cell such as the electrochemical cell disclosed in U.S. Patent 5,316,644 to Titterington, et al., entitled "High-Pressure Electrochemical Cell Structure", which patent is hereby incorporated herein by reference.  
15 As is well known in the art, such an electrochemical cell may be an electrolysis cell 12 (as shown schematically in FIG. 1) for electrolytically separating water into oxygen and hydrogen gas. The electrolysis cell 12 typically includes an oxygen (or "O<sub>2</sub>") end assembly 14 and a hydrogen  
20 (or "H<sub>2</sub>") end assembly 16 on opposed sides of a solid polymer electrolyte membrane 18, all of which are disposed in a stack between a top end plate 20 and bottom end plate 22 that cooperate with a plurality of fastening components such as bolts and nuts (not shown) to compress the cell 12  
25 and align the cell with other cells (not shown) to form an electrochemical cell stack. As is well known in the art, each cell 12 also includes a variety of common, cooperative, functional structures, such as an insulator 24 adjacent the top end plate 20 and a positive terminal 26  
30 between the insulator 24 and oxygen end assembly 14, while a plate cover 28 lies between the bottom end plate 22 and the hydrogen end assembly 16.

As best shown schematically in FIG. 1, the oxygen end assembly 14 of the electrolysis cell 12 includes a

- 9 -

plurality of graded hardware components between an oxygen end pressure pad 30 and the solid polymer electrolyte membrane 18. The graded hardware components in the oxygen end 14 of the cell 12 include sequentially an oxygen porous plate frame 32, a top end separator 34, first, second and third oxygen screen frames 36, 38, 40, an oxygen membrane screen 42, and an oxygen grip protector ring 44 adjacent the solid polymer electrolyte membrane 18. Similarly, the hydrogen end assembly 16 of the cell 12 includes a plurality of graded hardware components between a hydrogen end pressure pad 46 and the solid polymer electrolyte membrane 18. The plurality of graded hardware components in the hydrogen end 16 of the cell 12 include a first hydrogen porous plate frame 48 (between the hydrogen pressure pad 46 and plate cover 28), a bottom end separator 49, and sequentially first, second and third hydrogen screen frames 50, 52, 54, a second hydrogen porous plate frame 56, and a hydrogen grip protector ring 58 adjacent the solid polymer electrolyte membrane 18. The hydrogen end assembly 16 also includes a porous plate 60 between the second hydrogen porous plate frame 56 and the hydrogen grip protector ring 58.

As seen in FIG. 1, the graded hardware components of the oxygen side 14 of the electrolysis cell 12 cooperate to define an oxygen side fluid cavity 61 between the solid polymer electrolyte membrane 18 and the top end separator 34, and the hardware components of the hydrogen side 16 of the cell 12 cooperate to define a hydrogen side fluid cavity 62 between the solid polymer electrolyte membrane 18 and the bottom end separator 49. Shown in FIG. 2 is a non-schematic presentation of a graded hardware component 10 that includes a frame 64 surrounding a screen 66. The frame 64 defines a first fluid through passage 68, a second fluid through passage 70, a first fluid entry passage 72, and a second fluid entry passage 74. As is well-known in

- 10 -

the art and more thoroughly described in the aforesaid incorporated U.S. Patent 5,316,644, when a plurality of hardware components 10 are stacked cooperatively the screens of such components would be disposed within a fluid cavity wherein the cavity would have sides defined by frames of the components so that a supply fluid such as water may pass into the cavity through the first fluid entry passage 72 and exit the cavity with entrained hydrogen gas through the second fluid entry passage 74 of the frame 64, while a product fluid such as oxygen gas is simultaneously passing through the first and/or second fluid through passages 68, 70 of the frame 64 without entering a fluid cavity defined by that frame 64. The frame 64 of the hardware component also defines a plurality of alignment notches 76A, 76B, 76C, and 76D, and a plurality of fastener notches 78A, 78B, 78C, 78D, 78E, 78F, 78G, 78H, 78I, 78J, 78K, 78L, 78M, 78N, 78O, and 78P that secure fasteners (not shown) when the graded hardware component 10 is secured within a cell such as electrolysis cell 12.

As is apparent from FIGS. 1 and 2, the graded hardware components are exposed to fluids during operation of an electrochemical cell. In operation of a high pressure cell with a solid polymer electrolyte membrane, prior art hardware components had to be capable of withstanding five operational and assembly requirements including pressure differentials of approximately 6,000 p.s.i.; low pH of the fluids contacting surfaces of the hardware components; anodic or cathodic polarization; hydrogen embrittlement; and sufficiently hard surfaces to withstand fabrication stresses during operation and assembly of the cell, which requirements are discussed in more detail above. Consequently, prior art hardware components were typically made of specialty metals such as niobium, zirconium, titanium, or alloys thereof that are chemically stable,

- 11 -

mechanically strong, and have sufficiently hard surfaces. Components of an electrochemical cell such as the electrolysis cell 12 that are not characterized as graded hardware components would be fabricated of standard materials well known in the art.

The graded hardware component 10 of the present invention as shown in FIG. 3 is made of a substrate 76 such as stainless steel, a surface layer 78 made of a precious metal such as gold, and a graded boundary layer 80, wherein the graded boundary layer 80 is between 0.5wt.% to 5.0wt.% of the material making up the substrate, and between 99.5wt.% to 95.0wt.% of the material making up the surface layer, and wherein the graded boundary layer 80 is adjacent the substrate and has a thickness of between 10% to 90% of a shortest distance between the substrate 76 and an exterior surface 82 of the surface layer 78 so that the graded boundary layer contacts the substrate but does not contact the exterior surface 82 of the surface layer 78. In a preferred embodiment a shortest distance between the substrate and an exterior surface 82 of the surface layer is between 50 to 120 microinches; the graded boundary layer has a thickness of about 90% of a shortest distance between the substrate 76 and an exterior surface 82 of the surface layer 78; and the exterior surface of the surface layer has a hardness of between 150 to 200 on the Knoop scale. While gold or gold alloys are preferred metals for the surface layer, any metal or alloy that is more noble than mercury is capable of providing adequate protection to a substrate in an aqueous acidic solution provided the graded hardware component includes a graded boundary layer of the aforesaid concentrations and dimensions. Additionally, the substrate 76 may be a stainless steel such as well-known 300 series stainless steels, or the substrate 76 may be any standard engineering material that meets well-known strength and chemical compatibility requirements of known

- 12 -

electrochemical cells.

A preferred method of manufacturing the graded hardware component 10 includes the steps of first coating or applying an acid gold strike to the substrate 76; next  
5 applying a coating of hard gold to the once coated substrate; and then heating the twice coated substrate to between 200°C to 500°C for between 1 to 24 hours. An even more preferred method of manufacturing the graded metal hardware component includes the aforesaid first and second  
10 applying steps and then heating the twice coated substrate at between 250°C to 350°C for between 3 to 5 hours. The heating step has been found to enhance a metallurgical bond and heal any defects between the substrate, graded boundary layer and surface layer. A preferred method for  
15 application of the coatings or deposits of acid and hard gold is electroplating. If a precious metal other than gold is used for the surface layer, then the aforesaid method of manufacture of the graded hardware component 10 includes first application of an acid metal strike to the  
20 substrate followed by application of a hard metal to form the surface layer. A most preferred embodiment of the graded metal hardware component includes use of a 316L stainless steel wherein a shortest distance from the substrate to the exterior surface of the surface layer is  
25 approximately 75 microinches.

For purposes of the present invention, application of an "acid gold strike" or "acid metal strike" means application of the gold or metal by a deposit from an acid solution such as known acid chlorides commonly used in  
30 electroplating. Similarly, for the present invention, "hard gold" or "hard metal" means the gold or metal includes a concentration of between 0.1wt.% - 0.3wt.% of a transition metal, such as nickel, cobalt, or iron. A preferred method of application of the hard gold or hard  
35 metal is for the hard gold or hard metal to be deposited

- 13 -

onto the once coated substrate from a solution having a pH of approximately 4.5 and having a temperature of between 100 degrees fahrenheit (hereafter "°F") to 150°F until the resulting surface and graded boundary layers reach depth of  
5 between 50 - 120 microinches, meaning in other words a shortest distance from the substrate to an exterior surface of the surface layer is between 50 - 120 microinches.

In operation of an electrochemical cell, conductive hardware components exposed to an electrical potential  
10 across an electrolyte experience anodic and cathodic polarization as discussed above. Because such polarization may result in damage to hardware components simultaneously exposed to aqueous acidic solutions, prior art electrochemical cells utilizing solid polymer electrolyte  
15 membranes therefore utilized hardware components made of specialty metals such as niobium, zirconium, titanium, etc., to minimize deleterious effects of such polarization. To determine response to such stressful conditions of a graded metal hardware component constructed in accordance  
20 with the present invention, an experiment was performed that measured electrochemical resistance to anodic and cathodic polarization of the substrate of the graded metal hardware component by comparing polarization behavior of the graded component to polarization behavior of a  
25 reference component made of solid gold. In the experiment, the graded metal hardware component having a 316L stainless steel substrate completely encased by a surface layer primarily of gold and the reference component of solid gold were immersed in a 0.1N solution of  $H_2SO_4$  and an electrical  
30 potential in a range relevant to water electrolysis of -2 Volts ("V") to +2V direct current was applied to the graded component and reference component. Figure 4 is a graph that plots the behavior of the graded metal hardware component in a broken plot line 84 and also plots the  
35 behavior of a solid gold reference hardware component in a



- 14 -

solid plot line 86 through the aforesaid -2V to +2V range. As is apparent from FIG. 4, a corrosion current plotted along the X axis of the graph (being between  $1 \times 10^{-10}$  amps ("A") (represented in FIG. 4 as "1E-10") to  $1 \times 10^{-1}$  A (represented in FIG. 4 as "1E-1")) for the graded metal hardware component and reference component show essentially identical current responses throughout the voltage range. The corrosion current in the experiment is a direct measure of a rate of corrosion for the two components and hence the experiment shows that a rate of corrosion for the graded metal hardware component is approximately the same as for pure gold so that it is appropriate for usage in an electrochemical cell involving exposure to acidic aqueous solutions. Likewise, it can be concluded that the surface layer of a graded metal hardware component constructed in accordance with the present invention is as noble as pure gold when exposed to operating conditions of an electrochemical cell. Therefore, the stainless steel substrate will not experience the deleterious effect of dissolving at an unacceptable rate when the surface layer encasing the substrate is exposed to an aqueous acidic solution and anodic polarization within an operating electrochemical cell utilizing a solid polymer electrolyte membrane.

While the present invention has been described and illustrated with respect to a particular construction, it will be understood by those skilled in the art that the present invention is not limited to this particular example. For example, the graded metal hardware component 10 has been described within an electrolysis cell 12, but could also be utilized within a fuel cell configuration of an electrochemical cell. Accordingly, reference should be made primarily to the attached claims rather than the foregoing specification to determine the scope of the invention.

- 15 -

## CLAIMS

What is claimed is:

1. A graded metal hardware component for mechanically supporting electrochemical cell structures and for defining fluid cavities and fluid passages within the cell, comprising:
  - 5 a. a substrate;
  - b. a surface layer; and,
  - c. a graded boundary layer adjacent to, between and in contact with the substrate and surface layer, the graded boundary layer being an interdiffusion of the substrate and surface layer wherein the  
10 graded boundary layer is between 0.5wt.% to 5.0wt.% of the material making up the substrate and between 99.5wt.% to 95.0wt.% of the material making up the surface layer and the graded  
15 boundary layer has a thickness of between 10% to 90% of a shortest distance between the substrate and an exterior surface of the surface layer so that the graded boundary layer contacts the substrate but does not contact the exterior  
20 surface of the surface layer.
2. The graded metal hardware component of Claim 1, wherein the graded boundary layer has a thickness of about 90% of a shortest distance between the substrate and the exterior surface of the surface layer.
3. The graded metal hardware component of Claim 1, wherein the surface layer comprises a metal that is more noble than mercury.
4. The graded metal hardware component of Claim 1, wherein the substrate is a stainless steel.

- 16 -

5. The graded metal hardware component of Claim 1, wherein the surface layer comprises gold.

6. The graded metal hardware component of Claim 1, wherein the shortest distance between the substrate and the exterior surface of the surface layer is between 50 to 120 microinches.

7. The graded metal hardware component of Claim 1, wherein the surface layer has a hardness of between 150 to 200 on the Knoop scale.

8. A graded metal hardware component for mechanically supporting electrochemical cell structures and for defining fluid cavities and fluid passages within the cell, comprising:

- 5       a. a substrate;
- b. a surface layer being a metal more noble than mercury; and,
- c. a graded boundary layer adjacent to, between and  
10       in contact with the substrate and surface layer,  
the graded boundary layer being an interdiffusion  
of the substrate and surface layer wherein the  
graded boundary layer is between 0.5wt.% to  
5.0wt.% of the material making up the substrate  
and between 99.5wt.% to 95.0wt.% of the material  
15       making up the surface layer and the graded  
boundary layer has a thickness of between 10% to  
90% of a shortest distance between the substrate  
and an exterior surface of the surface layer so  
that the graded boundary layer contacts the  
20       substrate but does not contact the exterior  
surface of the surface layer.

- 17 -

9. The graded metal hardware component of Claim 8, wherein the graded boundary layer has a thickness of about 90% of a shortest distance between the substrate and the exterior surface of the surface layer.

10. The graded metal hardware component of Claim 9, wherein the surface layer comprises gold.

11. The graded metal hardware component of Claim 10, wherein the substrate is a stainless steel.

12. The graded metal hardware component of Claim 11, wherein the shortest distance between the substrate and the exterior surface of the surface layer is between 50 to 120 microinches.

13. The graded metal hardware component of Claim 11, wherein the shortest distance between the substrate and the exterior surface of the surface layer is about 75 microinches.

14. A method of manufacturing a graded metal hardware component for mechanically supporting electrochemical cell structures and for defining fluid cavities and fluid passages within the cell, comprising the steps of:

- 5       a. applying an acid metal strike to a substrate wherein the metal is more noble than mercury;
- b. applying a coating of hard metal to the once coated substrate to form a surface layer adjacent the substrate, wherein the hard metal is the more noble than mercury metal and further includes  
10       between 0.1wt.% to 0.3wt.% of a transition metal; and,
- c. then heating the twice coated substrate to between 200°C to 500°C for between 1 to 24 hours

- 18 -

15           to form a graded boundary layer between the  
            substrate and surface layer, wherein the graded  
            boundary layer is between 0.5wt.% to 5.0wt.% of  
            the material making up the substrate and between  
20           99.5wt.% to 95.0wt.% of the material making up  
            the surface layer and the graded boundary layer  
            has a thickness of between 10% to 90% of a  
            shortest distance between the substrate and an  
            exterior surface of the surface layer so that the  
            graded boundary layer contacts the substrate but  
25           does not contact the exterior surface of the  
            surface layer.

15. The method of Claim 14, wherein the steps of applying  
the acid metal strike and applying a coating of hard metal  
to the substrate further comprise applying an acid gold  
strike to the substrate and applying a coating of hard gold  
5 to the once coated substrate.

16. The method of Claim 14, wherein the step of applying  
the acid metal strike to the substrate further comprises  
applying the metal by an electroplating deposit from an  
acidic solution, and the step of applying a coating of hard  
5 metal to the substrate further comprises applying the hard  
metal by an electroplating deposit from a solution having  
a Ph of about 4.5 and having a temperature of between 100°F  
to 150°F until a shortest distance from the substrate to the  
exterior surface of the surface layer is between 50 to 120  
10 microinches.

17. The method of Claim 16, wherein the steps of applying  
the acid metal strike and applying a coating of hard metal  
to the substrate further comprise applying an acid gold  
strike to the substrate and applying a coating of hard gold  
5 to the once coated substrate.

- 19 -

18. The method of Claim 17, wherein the steps of applying the acid metal strike and applying a coating of hard metal to the substrate further comprise applying an acid gold strike to a stainless steel substrate and applying a  
5 coating of hard gold to the once coated stainless steel substrate.

19. The method of Claim 14, wherein the step of heating further comprises heating the twice coated substrate at between 250°C to 350°C for between 3 to 5 hours.

FIG. 1


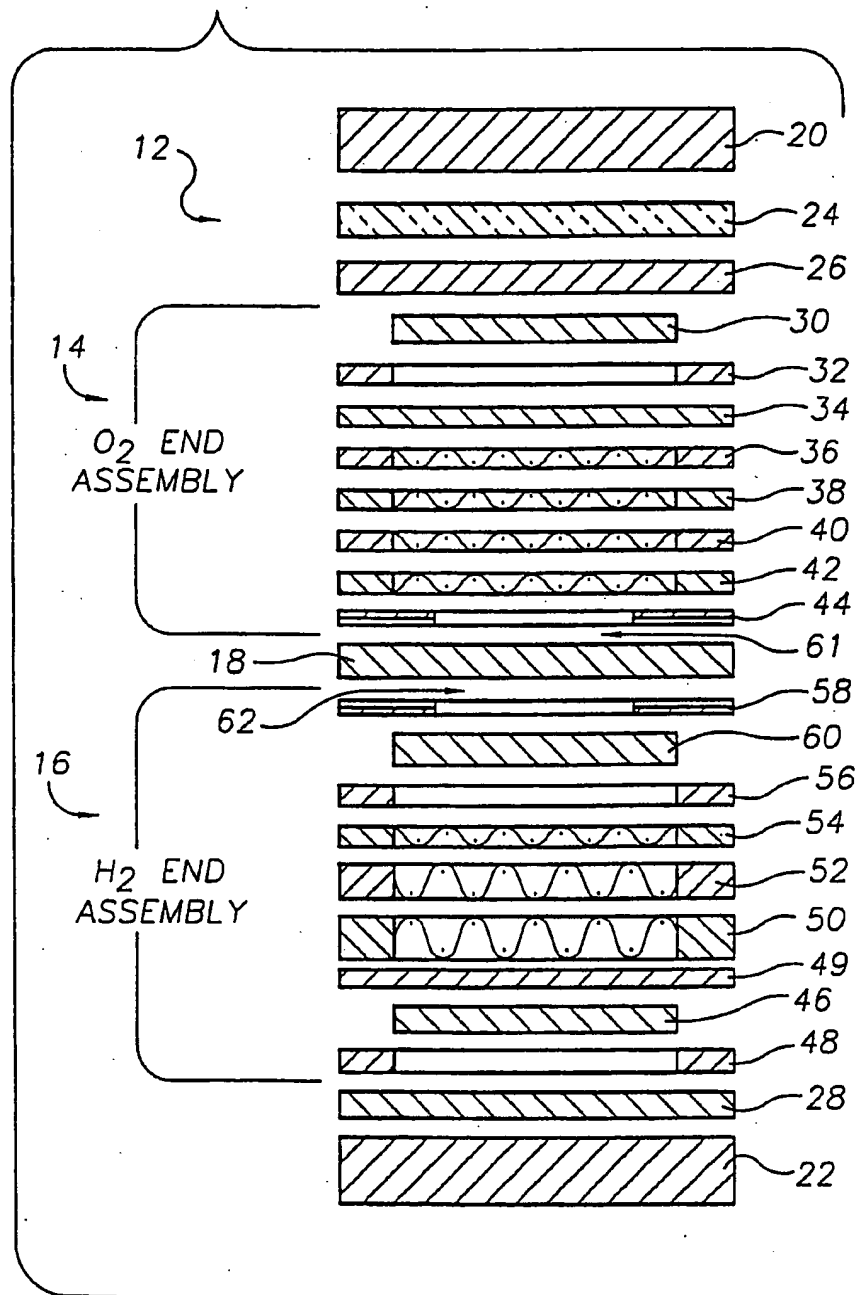






FIG. 4

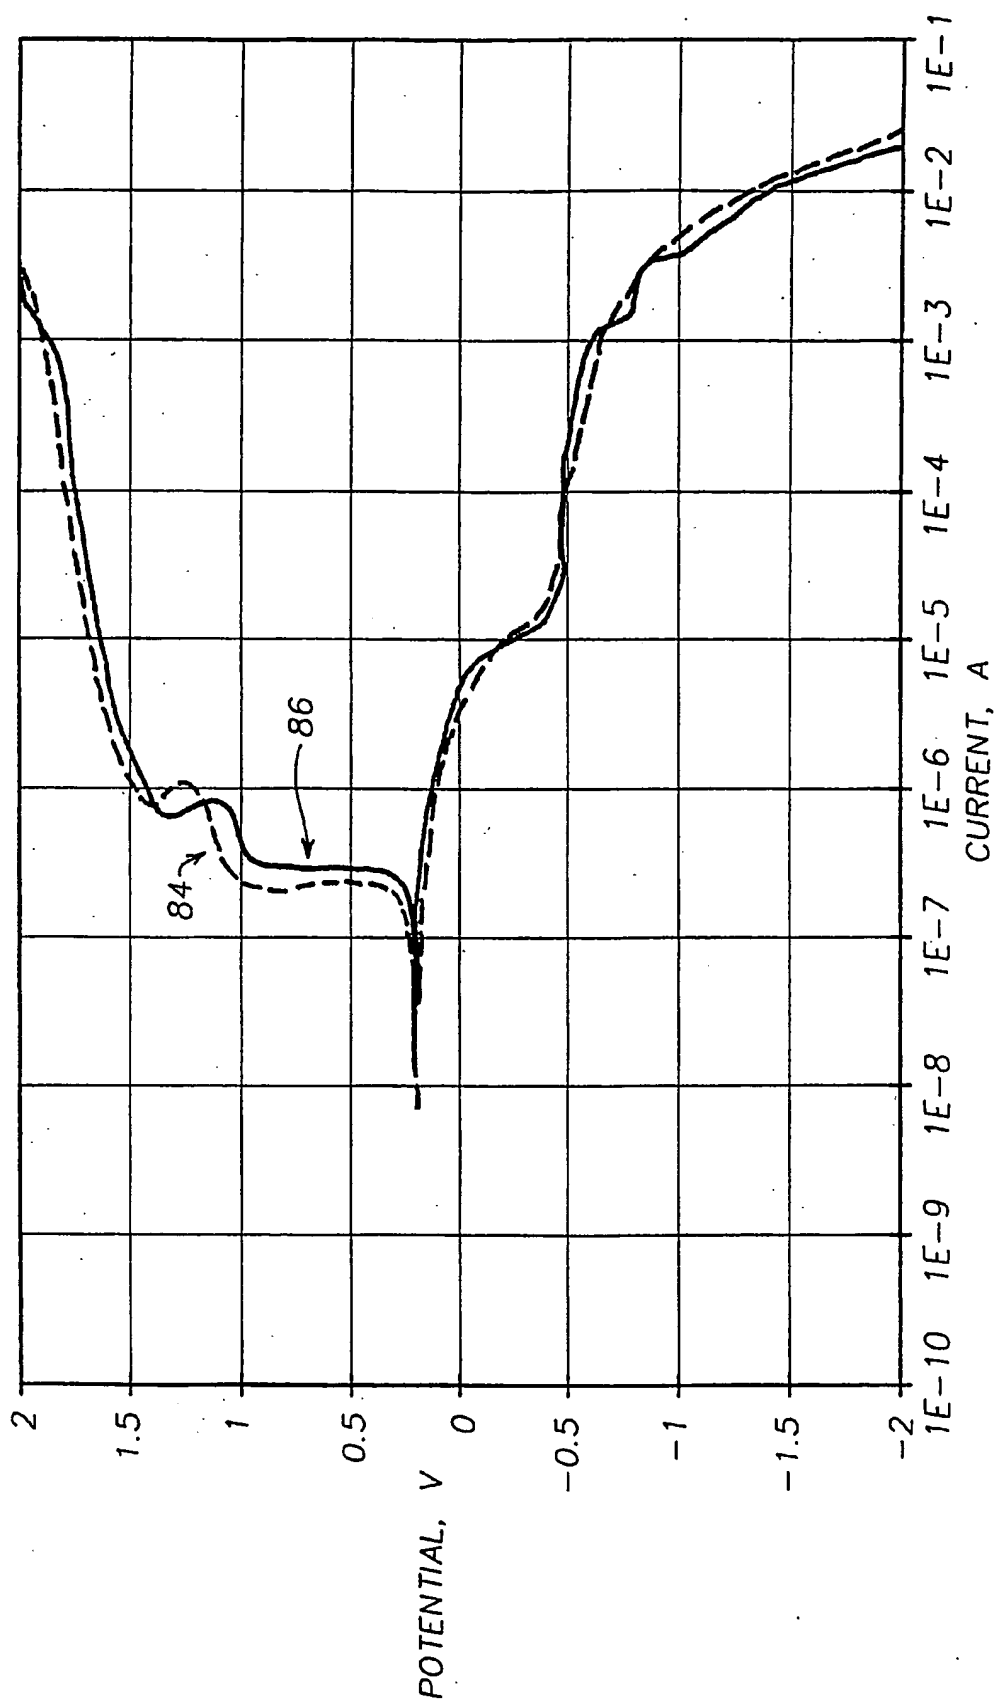

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/04629

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 C25B9/00 C25D5/10 C23C26/00 C23C28/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C25D C23C C25B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 137 230 A (CHUGAI DENKI KOGYO KABUSHIKI KAISHA) 3 October 1984 see page 1, line 66 - line 94 see page 1, line 106 - page 2, line 4 ---	1,3-5,8, 10,11
X	GB 2 113 577 A (CHUGAI DENKI KOGYO K.K.) 10 August 1983 see column 1, line 35 - line 46 see page 2; claims 1-4 ---	1,3-5,8, 10,11
A	PATENT ABSTRACTS OF JAPAN vol. 005, no. 058 (C-051), 21 April 1981 & JP 56 009387 A (SEIKO INSTR & ELECTRONICS LTD), 30 January 1981, see abstract --- -/--	14

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

5 June 1998

Date of mailing of the international search report

16/06/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Groseiller, P

# INTERNATIONAL SEARCH REPORT

Int. l. Application No  
PCT/US 98/04629

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 203 450 A (INCO LIMITED) 19 October 1988 see page 12 - page 14; claims 1-19 ---	1, 14
A	US 5 158 653 A (D.S. LASHMORE) 27 October 1992 see column 6, line 10 - line 14 -----	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/04629

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2137230 A	03-10-1984	US 4475991 A	09-10-1984
		CH 658566 A	28-11-1986
		DE 3407559 A	27-09-1984
		FR 2551092 A	01-03-1985
		JP 59177361 A	08-10-1984
GB 2113577 A	10-08-1983	NONE	
GB 2203450 A	19-10-1988	CA 1270408 A	19-06-1990
		DE 3810955 A	27-10-1988
		FR 2615529 A	25-11-1988
		US 4956026 A	11-09-1990
US 5158653 A	27-10-1992	US 5268235 A	07-12-1993
		US 5320719 A	14-06-1994